



Declaration of Performance

N°CHIMFORTKEM_V_01A_EN

DoP num. kemvinyl

Bonded anchor Vinylester resin in cartridge



1. Identification of the product: **KEM Vinylester – KEM V**

2. Identification code (art. 11.4), for the batch or serial number see packaging:

Type of Cartridge	Format	Cod.
Coaxial	280 ml (stone)	344 625 000
	380 ml (concrete)	344 615 000
Silicon Gun	310 - 380 ml	344 586 000 – 344 596 000

3. Intended use: **See Annex I°**

4. Manufacturer (art. 11.5): **Friulsider SpA via trieste,1 - 33048 San Giovanni al Natisone (UD) - Italy**

5. Authorised representative (art. 12.2): **Not Relevant**

6. System of Assessment AVCP (annex V): **System 1**

7/8. Harmonised Specification & Notified Body:

	Name of Body	System of Assessment	Reference	EAD / hEN Document
Technical Specification Document	DiBt _[TAB]	1	ETA-08/0383	EAD 330499-00-0601
Constancy of Performance & FPC	MPA Darmstadt 1343 _[NB]	1	1343-CPR-M 527-12	EAD 330499-00-0601
Technical Specification Document	DiBt _[TAB]	1	ETA-12/0533	EAD 330087-00-0601
Constancy of Performance & FPC	MPA Darmstadt 1343 _[NB]	1	1343-CPR-M 527-11	EAD 330087-00-0601
Technical Specification Document	DiBt _[TAB]	1	ETA-12/0543	ETAG029
Constancy of Performance & FPC	MPA Darmstadt 1343 _[NB]	1	1343-CPR-M 527-6_10.16	ETAG029

9. Declared Performance: **See Annexes**

10. The performance of the product identified in points 1 and 2 is in conformity with declared performance in point 9.

This declaration of performance is issued under the sole responsibility of ETANCO.

Signed for and behalf of the manufacturer by:

Function	Name	Signature	Place and date of issue
Chef de produits	Damien Loizelle		Le Pecq, 18.12.2018

ANNEX I° "Intended use"

Generic type	Bonded anchor for anchorage of Threaded Rod and Rebar as ETA-08/0383
Base Material	Concrete C20/25 to C50/60 acc. to EN206-1
Use category	- Installation in dry and wet concrete (flooded holes up to d.16) - Overhead installation
Material & Durability	- Galvanized steel cl.4.6 to cl.8.8 acc. to EN ISO898 for dry internal conditions - Stainless Steel cl. A4-50/70/80 acc. to EN ISO3506 for internal and external use without particular aggressive conditions - High Resistant Stainless Steel HCR-50/70/80 acc. to EN ISO3506 for all conditions - Rebar Class B and C as EN 1992-1-1:2004+AC:2010, Annex C
Loading	Static, quasi-static and Seismic load
Temperature Range	-40°C to +40°C max long term temperature +24°C and max short term temperature +40°C -40°C to +80°C max long term temperature +50°C and max short term temperature +80°C -40°C to +120°C max long term temperature +72°C and max short term temperature +120°C
Fire Reaction	A1 according to EN 13501-1

Generic type	Bonded anchor for anchorage of Post-Installed Rebar Connection as ETA-12/0533
Base Material	Non-carbonated Concrete C12/15 to C50/60 acc. to EN206-1 [max 0,4 % CL]
Use category	- Installation in dry and wet concrete (not flooded holes) - Overlap joint with existing reinforcement in a building component - Anchoring of the reinforcement at a slab or beam support - Anchoring of reinforcement of building components stressed primarily in compression - Anchoring of reinforcement to cover the envelope line of tensile force in the bending member
Material & Durability	- Rebar Class B and C as EN 1992-1-1:2004+AC:2010, Annex C - ZA Tension Anchor B500 B as DIN 488 for internal and external use without particular aggressive conditions - ZA Tension Anchor Stainless Steel A4 as DIN 488 for internal and external use without particular aggressive conditions - ZA Tension Anchor High Resistance Stainless Steel HCR as DIN 488 for all conditions
Loading	Static, quasi-static and Fire Exposure as EN1992-1 [EC2]
Temperature Range	-40°C to +80°C max long term temperature +50°C and max short term temperature +80°C
Fire Reaction	A1 according to EN 13501-1

Generic type	Bonded anchor for anchorage of threaded rod on Masonry as ETA-12/0543
Base Material	b, c e d, Solid brick, Hollow brick and Autoclaved Areated Concrete as EN771
Use category	- d/d: installation and use in dry masonry - w/w: installation and use in wet masonry
Material & Durability	- Galvanized steel cl.4.6 to cl.8.8 acc. to EN ISO898 for dry internal conditions - Stainless Steel cl. A4-50/70/80 acc. to EN ISO3506 for internal and external use without particular aggressive conditions - High Resistant Stainless Steel HCR-50/70/80 acc. to EN ISO3506 for all conditions
Loading	Static, quasi-static
Temperature Range	-40°C to +40°C max long term temperature +24°C and max short term temperature +40°C -40°C to +80°C max long term temperature +50°C and max short term temperature +80°C -40°C to +120°C max long term temperature +72°C and max short term temperature +120°C
Fire Reaction	A1 according to EN 13501-1

ANNEX II°

Declared Performances as ETA-08/0383 and EAD 330499-00-0601

Design method as CEN/TS 1992-4

ESSENTIAL CHARACTERISTICS				PERFORMANCE								
d	Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30	
d ₀	Nominal diameter of drill bit [mm]			10	12	14	18	24	28	32	35	
h _{ef}	Effective embedment depth			60	60	70	80	90	96	108	120	
	h _{ef,min} [mm]			80	90	110	125	170	210	240	270	
	h _{ef,max} [mm]			160	200	240	320	400	480	540	600	
h _{min}	Minimum thickness of the concrete member [mm]			h _{ef} + 30 ≥ 100			h _{ef} + 2d ₀					
T _{inst}	Torque moment (max) [Nm]			10	20	40	80	120	160	180	200	
s _{min}	Minimum spacing [mm]			40	50	60	80	100	120	135	150	
c _{min}	Minimum edge distance [mm]			40	50	60	80	100	120	135	150	
TENSION Steel failure												
N _{Rk,s}	Tension Steel charact. failure			cl. 4.6-4.8 [kN]	15	23	34	63	98	141	184	224
				cl. 5.6-5.8 [kN]	18	29	42	78	122	176	230	280
				cl. 8.8 [kN]	29	46	67	125	196	282	368	449
				A4-70 (50) [kN]	26	41	59	110	171	247	(230)	(281)
N _{Rk,s,seis,C1}	Tension Steel charact. failure Cat. Seismic C1 [kN]			1,0 x N _{Rk,s}								
γ _{Ms,N} ¹⁾	Partial safety factor			cl. 4.6-5.6 [-]	2,0							
				cl. 4.8-5.8-8.8 [-]	1,5							
				A4-70 (50) [-]	1,87						(2,86)	
Combined pull-out and concrete failure: "DRY-WET"												
τ _{Rk,ucr}	Characteristic bond resistance for un-cracked concrete C20/25			40°/24°C [MPa]	10	12	12	12	12	11	10	9
				80°/50°C [Mpa]	7,5	9	9	9	9	8,5	7,5	6,5
				120°/72°C [MPa]	5,5	6,5	6,5	6,5	6,5	6,5	5,5	5
τ _{Rk,cr}	Characteristic bond resistance for Cracked concrete C20/25			40°/24°C [MPa]	4	5	5,5	5,5	5,5	5,5	6,5	6,5
				80°/50°C [Mpa]	2,5	3,5	4	4	4	4	4,5	4,5
				120°/72°C [MPa]	2	2,5	3	3	3	3	3,5	3,5
τ _{Rk,seis,C1}	Characteristic bond resistance for Cat. Seismic C1 C20/25			40°/24°C [MPa]	2,5	3,1	3,7	3,7	3,7	3,8	4,5	4,5
				80°/50°C [Mpa]	1,6	2,2	2,7	2,7	2,7	2,8	3,1	3,1
				120°/72°C [MPa]	1,3	1,6	2	2	2	2,1	2,4	2,4
Combined pull-out and concrete failure: "FLOODED HOLES"				M8	M10	M12	M16	M20	M24	M27	M30	
τ _{Rk,ucr}	Characteristic bond resistance for un-cracked concrete C20/25			40°/24°C [MPa]	7,5	8,5	8,5	8,5	(NPD)			
				80°/50°C [MPa]	5,5	6,5	6,5	6,5				
				120°/72°C [MPa]	4	5	5	5				
τ _{Rk,cr}	Characteristic bond resistance for Cracked concrete C20/25			40°/24°C [MPa]	4	4	5,5	5,5	(NPD)			
				80°/50°C [MPa]	2,5	3	4	4				
				120°/72°C [MPa]	2	2,5	3	3				
τ _{Rk,seis,C1}	Characteristic bond resistance for Category Seismic C1 C20/25			40°/24°C [MPa]	2,5	2,5	3,7	3,7	(NPD)			
				80°/50°C [MPa]	1,6	1,9	2,7	2,7				
				120°/72°C [MPa]	1,3	1,6	2	2				
ψ _c	Increasing factor for concrete			C30/37 [-]	1,04							
				C40/50 [-]	1,08							
				C50/60 [-]	1,10							
Concrete Cone failure												
K _{cr}	Factor acc. to CEN/TS 1992-4-5 sec.6.2.2.3 cracked [-]			7,7								
K _{ucr}	Factor acc. to CEN/TS 1992-4-5 sec.6.2.2.3 un-cracked [-]			11								
c _{cr,N}	Critical edge distance [mm]			1,5 x h _{ef}								
s _{cr,N}	Critical spacing [mm]			2,0 x C _{cr,N}								
Splitting failure												
c _{cr,sp}	Critical edge distance for Splitting			h/h _{ef} ≥ 2,0 [mm]	1,0 x h _{ef}							
				2,0 > h/h _{ef} > 1,3 [mm]	2 x h _{ef} (2,5 – h/h _{ef})							
				h/h _{ef} ≤ 1,3 [mm]	2,4 x h _{ef}							
s _{cr,sp}	Critical spacing for Splitting [mm]			2,0 x C _{cr,sp}								
γ _{inst}	Installation safety factor for dry and wet concrete [-]			1,0	1,2							
γ _{inst}	Installation safety factor for flooded holes [-]			1,4				(NPD)				

¹⁾ In absence of other national regulations.

ANNEX III°

Declared Performances as ETA-08/0383 and EAD 330499-00-0601

Design method as CEN/TS 1992-4

ESSENTIAL CHARACTERISTICS				PERFORMANCE							
d	Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
SHEAR Steel failure											
V _{Rk,s}	Shear Steel charact. failure	cl. 4.6-4.8	[kN]	9	14	20	36	59	85	110	115
		cl. 5.6-5.8	[kN]	9	15	21	39	61	88	115	140
		cl. 8.8	[kN]	15	23	34	63	98	141	184	224
		A4-70 (50)	[kN]	13	20	30	55	86	124	(115)	(140)
V _{Rk,seis,C1}	Shear Steel charact. failure Cat. Sismica C1		[kN]	0,70 x V _{Rk,s}							
M ⁰ _{Rk,s}	Charact. Bending Moment	cl. 4.6-4.8	[Nm]	15	30	52	133	260	449	666	900
		cl. 5.6-5.8	[Nm]	19	37	65	166	324	560	833	1123
		cl. 8.8	[Nm]	30	60	105	266	519	896	1333	1797
		A4-70 (50)	[Nm]	26	52	92	232	454	784	(832)	(1125)
M ⁰ _{Rk,s,seis,C1}	Charact. Bending Moment Cat. Sismica C1		[Nm]	(NPD)							
γ _{Ms,v} ²⁾	Partial safety factor	cl. 4.6-5.6	[-]	1,67							
		cl. 4.8-5.8-8.8	[-]	1,25							
		A4-70 (50)	[-]	1,56							(2,38)
K ₇	Ductility factor rif. CEN/TS 1992-4-5 sez. 6.3.2.1		[-]	1,0							
Concrete Pry-out failure											
K ₈	Factor in equation 27 of CEN/TS 1992-4-5 sec.6.3.3		[-]	2,0							
γ _{inst}	Installation safety factor		[-]	1,0							
Concrete Edge failure											
l _f	Effective length of anchor		[-]	l _f ≤ min (h _{ef} ; 8x _{d_{nom}})							
d _{nom}	Outside diameter of anchor		[mm]	8	10	12	16	20	24	27	30
γ _{inst}	Installation safety factor		[-]	1,0							
α _{gap}	Factor for anular gap		[-]	0,5 (1,0) ¹⁾							

¹⁾ Value in brackets valid for filled annular gap between anchor and clearance hole in the fixture. Use of special filling washer Annex A3 of ETA-08/0383 is required;

²⁾ In absence of other national regulations.

Displacements under TENSION load (threaded rod) ¹⁾				M8	M10	M12	M16	M20	M24	M27	M30
$\delta_{N0,ucr}$ - factor	Short term displacement in Normal Concrete	40°/24°C	[mm/MPa]	0,021	0,023	0,026	0,031	0,036	0,041	0,045	0,049
		80°/50°C		0,050	0,056	0,063	0,075	0,088	0,100	0,110	0,119
		120°/72°C		0,050	0,056	0,063	0,075	0,088	0,100	0,110	0,119
$\delta_{N\infty,ucr}$ - factor	Long term displacement in Normal Concrete	40°/24°C	[mm/MPa]	0,030	0,033	0,037	0,045	0,052	0,060	0,065	0,071
		80°/50°C		0,072	0,081	0,090	0,108	0,127	0,145	0,159	0,172
		120°/72°C		0,072	0,081	0,090	0,108	0,127	0,145	0,159	0,172
$\delta_{N0,cr}$ - factor	Short term displacement in Cracked Concrete	40°/24°C	[mm/MPa]	0,090	0,070						
		80°/50°C		0,105	0,170						
		120°/72°C		0,219	0,170						
$\delta_{N\infty,cr}$ - factor	Long term displacement in Cracked Concrete	40°/24°C	[mm/MPa]	0,255	0,105						
		80°/50°C		0,219	0,245						
		120°/72°C		0,255	0,245						

¹⁾ Calculation of the displacement: $\delta_{N0} = \delta_{N0^-} \text{ factor} \cdot \tau$; τ : action bond stress for tension
 $\delta_{N\infty} = \delta_{N\infty^-} \text{ factor} \cdot \tau$.

Displacements under SHEAR load (threaded rod) ¹⁾				M8	M10	M12	M16	M20	M24	M27	M30
$\delta_{V0,ucr}$ - factor	Short term displacement in Normal Concrete	[mm/kN]		0,06	0,06	0,05	0,04	0,04	0,03	0,03	0,03
$\delta_{V\infty,ucr}$ - factor	Long term displacement in Normal Concrete			0,09	0,08	0,08	0,06	0,06	0,05	0,05	0,05
$\delta_{V0,cr}$ - factor	Short term displacement in Cracked Concrete	[mm/kN]		0,12	0,12	0,11	0,10	0,09	0,08	0,08	0,07
$\delta_{V\infty,cr}$ - factor	Long term displacement in Cracked Concrete			0,18	0,18	0,17	0,15	0,14	0,13	0,12	0,10

¹⁾ Calculation of the displacement: $\delta_{V0} = \delta_{V0^-} \text{ factor} \cdot V$; V : action shear load
 $\delta_{V\infty} = \delta_{V\infty^-} \text{ factor} \cdot V$.

ANNEX IV°

Declared Performances as ETA-08/0383 and EAD 330499-00-0601

Design method as CEN/TS 1992-4

ESSENTIAL CHARACTERISTICS				PERFORMANCE								
d	REBAR			Ø8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
d ₀	Nominal diameter of drill bit [mm]			12	14	16	18	20	24	32	35	40
h _{ef}	Effective embedment depth	h _{ef,min}	[mm]	60	60	70	75	80	90	100	112	128
		h _{ef,std}	[mm]	80	90	110	115	125	170	210	250	280
		h _{ef,max}	[mm]	160	200	240	280	320	400	480	540	640
h _{min}	Minimum thickness of the concrete member [mm]			h _{ef} + 30 ≥ 100			h _{ef} + 2d ₀					
s _{min}	Minimum spacing [mm]			40	50	60	70	80	100	125	140	160
c _{min}	Minimum edge distance [mm]			40	50	60	70	80	100	125	140	160
TENSION Steel failure												
N _{Rk,s}	Tension Steel charact. failure [kN]			A _s x f _{uk} ¹⁾								
N _{Rk,s,seis,C1}	Tension Steel charact. failure Cat. Seismic C1 [kN]			1,0 x A _s x f _{uk} ¹⁾								
A _s	Area resistant [mm²]			50	79	113	154	201	314	491	616	804
γ _{Ms,N} ²⁾	Partial safety factor [-]			1,4								
Combined pull-out and concrete failure: “DRY-WET”				Ø8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
τ _{Rk,ucr}	Characteristic bond resistance for un-cracked concrete C20/25	40°/24°C	[MPa]	10	12	12	12	12	12	11	10	8,5
		80°/50°C	[MPa]	7,5	9	9	9	9	9	8	7	6
		120°/72°C	[MPa]	5,5	6,5	6,5	6,5	6,5	6,5	6	5	4,5
τ _{Rk,cr}	Characteristic bond resistance for Cracked concrete C20/25	40°/24°C	[MPa]	4	5	5,5	5,5	5,5	5,5	5,5	6,5	6,5
		80°/50°C	[MPa]	2,5	3,5	4	4	4	4	4	4,5	4,5
		120°/72°C	[MPa]	2	2,5	3	3	3	3	3	3,5	3,5
τ _{Rk,seis,C1}	Characteristic bond resistance for Cat. Seismic C1 C20/25	40°/24°C	[MPa]	2,5	3,1	3,7	3,7	3,7	3,7	3,8	4,5	4,5
		80°/50°C	[MPa]	1,6	2,2	2,7	2,7	2,7	2,7	2,8	3,1	3,1
		120°/72°C	[MPa]	1,3	1,6	2	2	2	2	2,1	2,4	2,4
Combined pull-out and concrete failure: “FLOODED HOLES”												
τ _{Rk,ucr}	Characteristic bond resistance for un-cracked concrete C20/25	40°/24°C	[MPa]	7,5	8,5	8,5	8,5	8,5	(NPD)			
		80°/50°C	[MPa]	5,5	6,5	6,5	6,5	6,5				
		120°/72°C	[MPa]	4	5	5	5	5				
τ _{Rk,cr}	Characteristic bond resistance for Cracked concrete C20/25	40°/24°C	[MPa]	4	4	5,5	5,5	5,5	(NPD)			
		80°/50°C	[MPa]	2,5	3	4	4	4				
		120°/72°C	[MPa]	2	2,5	3	3	3				
τ _{Rk,seis,C1}	Characteristic bond resistance for Cat. Seismic C1 C20/25	40°/24°C	[MPa]	2,5	2,5	3,7	3,7	3,7	(NPD)			
		80°/50°C	[MPa]	1,6	1,9	2,7	2,7	2,7				
		120°/72°C	[MPa]	1,3	1,6	2	2	2				
Concrete Cone failure												
K _{cr}	Factor acc. to CEN/TS 1992-4-5 sec.6.2.2.3 cracked [-]			7,7								
K _{ucr}	Factor acc. to CEN/TS 1992-4-5 sec.6.2.2.3 un-cracked [-]			11								
c _{cr,N}	Critical edge distance [mm]			1,5 x h _{ef}								
s _{cr,N}	Critical spacing [mm]			2,0 x C _{cr,N}								
Splitting failure												
c _{cr,sp}	Critical edge distance for Splitting	h/h _{ef} ≥ 2,0	[mm]	1,0 x h _{ef}								
		2,0 > h/h _{ef} > 1,3	[mm]	2 x h _{ef} (2,5 – h/h _{ef})								
		h/h _{ef} ≤ 1,3	[mm]	2,4 x h _{ef}								
s _{cr,sp}	Critical spacing for Splitting			2,0 x C _{cr,sp}								
γ _{inst}	Installation safety factor for dry and wet concrete			1,0	1,2							
γ _{inst}	Installation safety factor for flooded holes			1,4					(NPD)			

¹⁾ f_{uk} shall be taken from the specifications of reinforcing bars;²⁾ In absence of other national regulations.

ANNEX V°

Declared Performances as ETA-08/0383 and EAD 330499-00-0601
Design method as CEN/TS 1992-4

ESSENTIAL CHARACTERISTICS			PERFORMANCE								
d	REBAR		Ø8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
SHEAR Steel failure											
V _{Rk,s}	Shear Steel charact. failure	[kN]	0,5 x A _s x f _{uk} ¹⁾								
V _{Rk,s,seis,C1}	Shear Steel charact. failure Cat. Seismic C1	[kN]	0,35 x A _s x f _{uk} ¹⁾								
A _s	Area resistant	[mm²]	50	79	113	154	201	314	491	616	804
M ⁰ _{Rk,s}	Charact. Bending Moment	[Nm]	1,2 x W _{el} x f _{uk} ¹⁾								
M ⁰ _{Rk,s seis,C1}	Charact. Bending Moment Cat. Seismic C1	[Nm]	(NPD)								
W _{el}	Elastic section modulus	[mm³]	50	98	170	269	402	785	1534	2155	3217
γ _{m,sV} ²⁾	Partial safety factor	[-]	1,5								
Concrete Pryout failure											
K _g	Factor in equation 27 of CEN/TS 1992-4-5 sec.6.3.3	[-]	2,0								
γ _{inst}	Installation safety factor	[-]	1,0								
Concrete Edge failure											
l _f	Effective length of anchor	[-]	l _f ≤ min (h _{ef} ; 8x _{d_{nom}})								
d _{nom}	Outside diameter of anchor	[mm]	8	10	12	14	16	20	25	28	32
γ _{inst}	Installation safety factor	[-]	1,0								
α _{gap}	Factor for annular gap	[-]	0,5 (1,0) ³⁾								

¹⁾ f_{uk} shall be taken from the specifications of reinforcing bars;

²⁾ In absence of other national regulations;

³⁾ Value in brackets valid for filled annular gap between anchor and clearance hole in the fixture. Use of special filling washer Annex A3 of ETA-08/0383 is required.

Displacements under TENSION load (rebar) ¹⁾			Ø8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
$\delta_{N0,ucr}$ - factor	Short term displacement in Normal Concrete	40°/24°C	0,021	0,023	0,026	0,028	0,031	0,036	0,043	0,044	0,052
		80°/50°C	0,050	0,056	0,063	0,069	0,075	0,088	0,104	0,113	0,126
		120°/72°C	0,050	0,056	0,063	0,069	0,075	0,088	0,104	0,113	0,126
$\delta_{N\infty,ucr}$ - factor	Long term displacement in Normal Concrete	40°/24°C	0,030	0,033	0,037	0,041	0,045	0,052	0,061	0,071	0,075
		80°/50°C	0,072	0,081	0,090	0,099	0,108	0,127	0,149	0,163	0,181
		120°/72°C	0,072	0,081	0,090	0,099	0,108	0,127	0,149	0,163	0,181
$\delta_{N0,cr}$ - factor	Short term displacement in Cracked Concrete	40°/24°C	0,090		0,070						
		80°/50°C	0,105		0,170						
		120°/72°C	0,219		0,170						
$\delta_{N\infty,cr}$ - factor	Long term displacement in Cracked Concrete	40°/24°C	0,255		0,105						
		80°/50°C	0,219		0,245						
		120°/72°C	0,255		0,245						

¹⁾ Calculation of the displacement: $\delta_{N0} = \delta_{N0} \text{- factor} \cdot \tau$; τ : action bond stress for tension
 $\delta_{N\infty} = \delta_{N\infty} \text{- factor} \cdot \tau$.

Displacements under SHEAR load (rebar) ¹⁾			Ø8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
$\delta_{V0,ucr}$ - factor	Short term displacement in Normal Concrete	[mm/kN]	0,06	0,05	0,05	0,04	0,04	0,04	0,03	0,03	0,03
$\delta_{V\infty,ucr}$ - factor	Long term displacement in Normal Concrete		0,09	0,08	0,08	0,06	0,06	0,06	0,05	0,04	0,04
$\delta_{V0,cr}$ - factor	Short term displacement in Cracked Concrete	[mm/kN]	0,12	0,12	0,11	0,11	0,10	0,09	0,08	0,08	0,07
$\delta_{V\infty,cr}$ - factor	Long term displacement in Cracked Concrete		0,18	0,18	0,17	0,16	0,15	0,14	0,12	0,11	0,10

¹⁾ Calculation of the displacement: $\delta_{V0} = \delta_{V0} \text{- factor} \cdot V$; V : action shear load
 $\delta_{V\infty} = \delta_{V\infty} \text{- factor} \cdot V$.

ANNEX VI°


Declared Performances as ETA-12/0553 and EAD 330087-00-0601

Design method as EN 1992-1-1:2004+AC:2010 and ETA-12/0553

ESSENTIAL CHARACTERISTICS				PERFORMANCE										
d	POST-INSTALLED REBAR			Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø22	Ø24	Ø25	Ø28	Ø32
d ₀	Nominal diameter of drill bit [mm]			12	14	16	18	20	25	28	32	32	35	40
ℓ _{v,MAX}	Maximum embedment depth [mm]			see table B2 of ETA-12/0553										
ℓ _{b,min}	Minimum anchorage length [mm]			§ 8.6 - § 8.7 EN 1992-1-1:2004+AC2010										
ℓ _{0,min}	Lap length [mm]			§ 8.11 EN 1992-1-1:2004+AC2010										
α _{lb}	Amplification Factor for ℓ _{b,min} and ℓ _{0,min} [-]			1,0										
c ^{1) 2)}	Minimum concrete cover min c	Without drilling Aid	hammer drilling HD	[mm]	30 mm + 0,06•ℓ _v ≥ 2•Ø							40 mm + 0,06•ℓ _v ≥ 2•Ø		
			compr. air drilling CD	[mm]	50 mm + 0,08•ℓ _v							60 mm + 0,08•ℓ _v		
		With drilling Aid	hammer drilling HD	[mm]	30 mm + 0,02•ℓ _v ≥ 2•Ø							40 mm + 0,02•ℓ _v ≥ 2•Ø		
			compr. air drilling CD	[mm]	50 mm + 0,02•ℓ _v							60 mm + 0,02•ℓ _v		
s _{min}	Minimum spacing [mm]			≥ 5•Ø ≥ 50 mm										
Design values of ultimate bond resistance														
f _{bd}	Bond design value resistance “for all drilling methods for good conditions”	C12/15	[N/mm²]	1,6										
		C16/20	[N/mm²]	2,0										
		C20/25	[N/mm²]	2,3										
		C25/30	[N/mm²]	2,7										
		C30/37	[N/mm²]	3,0										
		C35/45	[N/mm²]	3,4										
		C40/50	[N/mm²]	3,7										
		C45/55	[N/mm²]	4,0 (3,7 for Ø28÷32)										
		C50/60	[N/mm²]	4,3 (3,7 for Ø28÷32)										
f _{bd,c}	“for all other bond conditions” [N/mm²]			f _{bd} • 0,7										
FIRE EXPOSURE Design method as EN 1992-1-1:2004+AC:2008														
f _{bd,fi}	Bond design value resistance Under fire exposure [N/mm²]			³⁾ f _{bd,fi} = k _{fi} (θ) • f _{bd} • γ _c / γ _{Mfi}										

¹⁾ Not allowed Diamond Drilling²⁾ The minimum concrete cover acc. EC 1992-1-1:2004+AC:2010 must be observed³⁾ With: k_{fi}(θ) = reduction factor under fire exposure (see graphics below)f_{bd} = see table aboveγ_c = partial safety factor acc.to EN 1992-1-1γ_{M,fi} = partial safety factor acc.to EN 1992-1-2 under fire exposure

Example graph of Reduction factor k_{fi}(θ) for concrete classes C20/25 for good bond conditions:

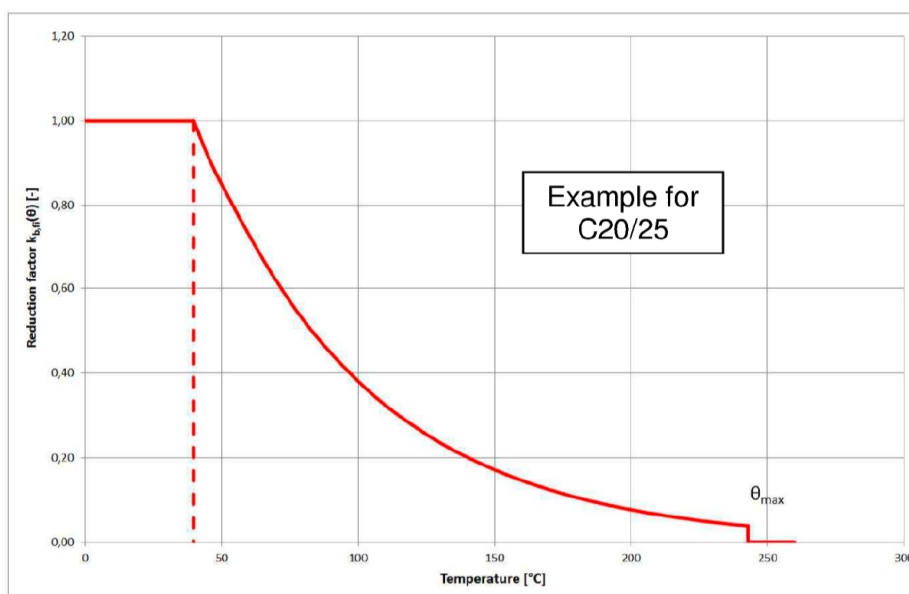

ANNEX VII°

Declared Performances as ETA-12/0543 and ETAG029

Design method as ETAG029-Annex C

ESSENTIAL CHARACTERISTICS					PERFORMANCE							
Installation parameters					SOLID MASONRY		M8		M10		M12	
d₀		Nominal diameter of drill bit			[mm]		10		12		14	
h_{ef}		Effective embedment depth			[mm]		80		90		100	
T_{inst}		Torque moment (max)			[Nm]		2					
Characteristic resistance to TENSILE and SHEAR loads ²⁾					M8		M10		M12			
Type ³⁾	density [Kg/dm ³]	compress. [N/mm ²]	Range temperature		N _{Rk,b} (tensile)	V _{Rk,b} (shear)	N _{Rk,b} (tensile)	V _{Rk,b} (shear)	N _{Rk,b} (tensile)	V _{Rk,b} (shear)		
Solid Brick ³⁾	ρ ≥ 1,6	f_b ≥ 10	40°/24°C	[kN]	3,5	3,5	3,5	3,5	4,0	3,5		
			80°/50°C	[kN]	3,5		3,5		4,0			
			120°/72°C	[kN]	2,5		3,0		3,5			
	ρ ≥ 1,6	f_b ≥ 28	40°/24°C	[kN]	5,5	5,5	6,0	5,5	7,0	5,5		
			80°/50°C	[kN]	5,5		6,0		7,0			
			120°/72°C	[kN]	4,5		5,0		6,0			
γ_M¹⁾ Partial safety factor				[-]		2,5						
Installation parameters					HOLLOW MASONRY “with bussola”		M8		M10		M12	
d₀		Nominal diameter of drill bit			[mm]		12		16		20	
h_{ef}		Effective embedment depth			[mm]		80		85		85	
T_{inst}		Torque moment (max)			[Nm]		2					
Characteristic resistance to TENSILE and SHEAR loads ²⁾					M8		M10		M12			
Type ³⁾	density [Kg/dm ³]	compress. [N/mm ²]	Range temperature		N _{Rk,b} (tensile)	V _{Rk,b} (shear)	N _{Rk,b} (tensile)	V _{Rk,b} (shear)	N _{Rk,b} (tensile)	V _{Rk,b} (shear)		
Brick Doppio UNI ³⁾	ρ ≥ 1,2	f_b ≥ 28	40°/24°C	[kN]	1,2	2,5	1,2	2,5	1,2	2,5		
			80°/50°C	[kN]	1,2		1,2		1,2			
			120°/72°C	[kN]	0,9		0,9		0,9			
Brick Forato leggero ³⁾	ρ ≥ 0,8	f_b ≥ 6	40°/24°C	[kN]	0,5	2,5	0,5	2,5	0,5	2,5		
			80°/50°C	[kN]	0,5		0,5		0,5			
			120°/72°C	[kN]	0,4		0,4		0,4			
γ_M¹⁾ Partial safety factor				[-]		2,5						

¹⁾ In absence of other national regulations;²⁾ Resistance values valid with Ccr edge distances, see ETA-12/0543 even for shorter distances;³⁾ See ETA-12/0543 for the description of bricks and for use on other types of bricks.