

FIXING BRACKET FOR STANDING SEAM ROOFING



FIXED BRACKET



SLIDING BRACKET

PRODUCT DEFINITION

- Fixed and sliding brackets, thickness 4/10^{ths} cut - stamped - ribbed.
- Each bracket has curved holes for countersunk screws.

SCOPE OF APPLICATION

- For fastening zinc standing seam profiles.
- Zinc foil is attached to solid wood battens of one of 4 types: fir, spruce, scots pine or poplar.
- The use of wood type with a pH < 5 (oak, chestnut, larch, Douglas fir, white or red cedar, etc.) is prohibited.
- Compatible bord de mer.

MATERIAL & FINISH

Material:

- Austenitic stainless steel A2 (AISI 304) - 1.4301 according to NF EN 10088.

INSTALLATION

Related products:

- VBU TF Pz2 stainless steel A2 Ø4x30 mm (code: 30 065)


Recommended tools:

- Screwdriver box SCS 4.8 (code: 321 670)
- Magnetic bits holder 1/4" (6.35 mm) (code: 323 105)
- Drive bits Pozidriv n°2 (code: 325 010)

PERFORMANCES

- Sliding brackets allow for dilatation of zinc roofing.

DIMENSIONS & CODES

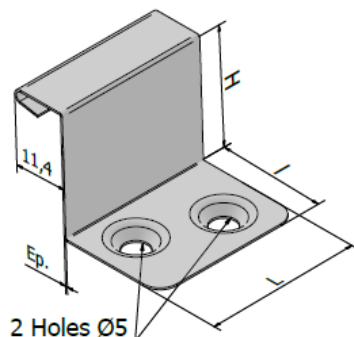

Designation	L. (mm)	l. (mm)	H. (mm)	Ep. (mm)	Code
FIXED BRACKET	33	23	26	0,4	643 312

L.: Length - l.: Width - H.: Hauteur - Ep.: Thickness

Registration date: 2023/06/14 - Revision A

LR ETANCO is associate member of:




LR ETANCO - Parc les Érables - Bât. 1 - 66 Route de Sartrouville

78231 Le Pecq Cedex France - www.etanco.eu

Tel: 01 34 80 52 00 - commercial.france@etanco.fr

DIMENSIONS & CODES

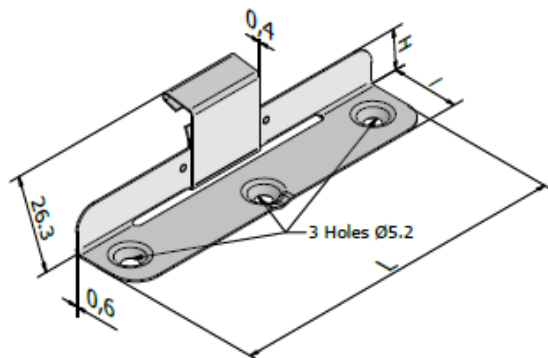

Designation	L. (mm)	I. (mm)	H. (mm)	Code
SLIDING BRACKET	108,6	13,5	22	643 712

L.: Length – I.: Width – H.: Hauteur

CONFORMITY

- Compliant with the DTU 40.41 (French recommendation).
- Fire reaction: A1 according to NF EN 13501-1.

MARKING & LABELLING

FIXED BRACKET:

- On packaging: FIXED BRACKET SS 304 CURVED HOLES + CODE.

SLIDING BRACKET:

- On packaging: BASE PLATE + SLIDING BRACKET SS 304 + CODE.

QUALITY CONTROL

- ISO 9001 certified quality management system according to the certificate in force.

NOTA

These products are intended for professional installers landlords whose the related service includes supply and installation. In accordance with rules and normative regulation, it's their responsibility to check that the use of these products is in conformity to themselves needs and their customers. They have to insure as well the adequacy of this material with their real operating conditions. The company excludes any guarantee for the use that does not respect these conditions. His responsibility is limited to the strict compliance with the specifications stipulated on the customer's purchase order. The guarantee is limited to the replacement of defective parts acknowledged by the Company's technical service, without workforce costs and travel expenses. It excludes material damage or physical injury and others direct or indirect damages, material or immaterial, which may result from defective parts including installation that not complying with the use for which they are designed and produced.

Registration date: 2023/06/14 – Revision A

LR ETANCO is associate member of:



LR ETANCO - Parc les Érables - Bât. 1 - 66 Route de Sartrouville

78231 Le Pecq Cedex France - www.etanco.eu

Tel: 01 34 80 52 00 – commercial.france@etanco.fr