

GRISBY 180 EXTENSION L. 125 MM FOR ISOLCO BRACKET



PRODUCT DEFINITION


- Adjustable extension that fits on the ISOLCO brackets for vertically mounting of timber frames.

MATERIAL & COATING

- Z450 galvanized steel.

INSTALLATION

- Recommended fasteners of the GRISBY extensions on the ISOLCO brackets:
 - Zinc-plated TRCC bolt Ø8x20 + M8 zinc-plated nut (Code: 54 505)
 - Fan washer Zinc plated Ø14x8 (Code: 73 010)
 - Galva Flat Washer Ø20x9x1 (Code: 71 050)
- Recommended fasteners of the timber frames on the GRISBY extensions:
 - Sherardized lag screw Ø7x50 (Code: 19 802)
 - Galva Flat Washer Ø18x8.5x1 (Code: 71 060)
 - Sherardized wood screw VBU TF Ø5x40 Blocking (2 minimum) (Code: 25 502)

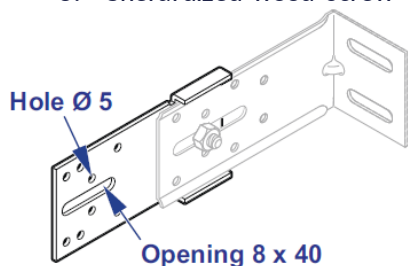

DIMENSION & CODE

Length (mm)	For BRACKET L. (mm)	Minimum P.R.* (mm)	Maximum P.R.* (mm)	Ø and number of holes (mm)	Thickness (mm)	Code
125	60 / x > 60	55	90	8x40 (x1) + Ø5 (x8)	2,5	367 226

(*) P.R.: Minimum/maximum adjustment range to be added to the length of the bracket > or = 60 mm.

MARKING - LABELLING

- On packaging: GRISBY EXTENSION 180 L. 125 mm + Code.

QUALITY CONTROL

- ISO 9001 certified quality management system according to certificate in force.

NOTE

These products are intended for professional installers landlords whose the related service includes supply and installation. In accordance with rules and normative regulation, it's their responsibility to check that the use of these products is in conformity to themselves needs and their customers. They have to insure as well the adequacy of this material with their real operating conditions. The company excludes any guarantee for the use that does not respect these conditions. His responsibility is limited to the strict compliance with the specifications stipulated on the customer's purchase order. The guarantee is limited to the replacement of defective parts acknowledged by the Company's technical service, without workforce costs and travel expenses. It excludes material damage or physical injury and others direct or indirect damages, material or immaterial, which may result from defective parts including installation that not complying with the use for which they are designed and produced.

Registration date: 10/02/2021 - Revision B

LR ETANCO is a member of:



ETANCO - Parc les Érables - Bât. 1 - 66 Route de Sartrouville
78231 Le Pecq Cedex France - www.etanco.eu

Phone: +33 (0)1 34 80 52 00 - commercial.france@etanco.fr